
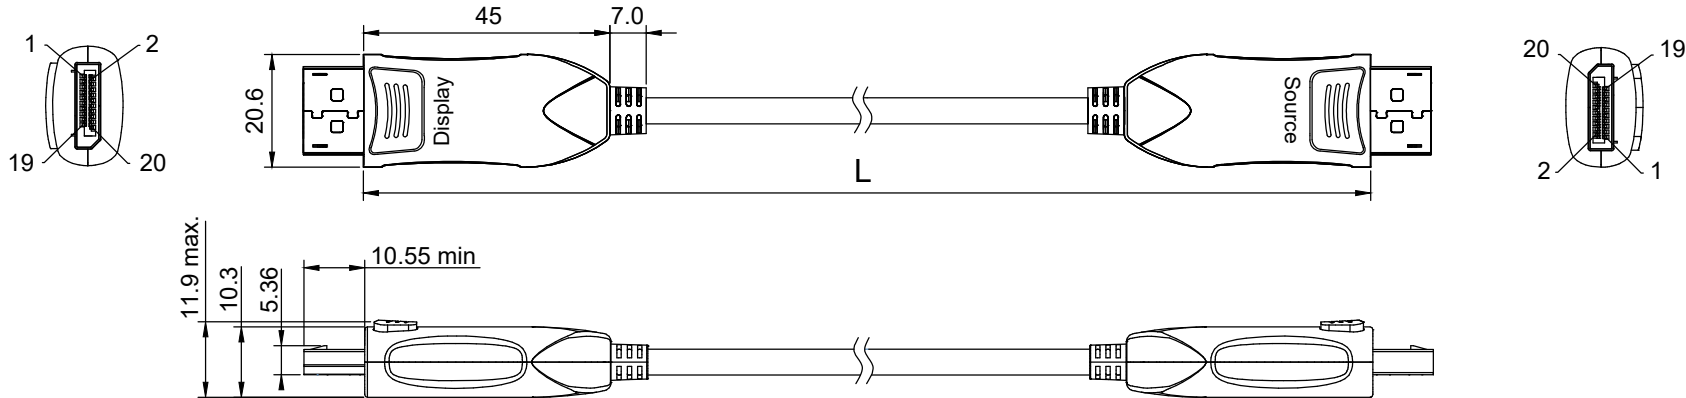


Artikel-Nr. / Item No.	Beschreibung / Description	Länge / Length
64866	DP 2.0 Optical Hybrid Kabel (AOC) G 1000 10m sw	10000 + 500 / - 100 mm
64867	DP 2.0 Optical Hybrid Kabel (AOC) G 2000 20m sw	20000 + 500 / - 100 mm
64868	DP 2.0 Optical Hybrid Kabel (AOC) G 3000 30m sw	30000 + 500 / - 100 mm
64869	DP 2.0 Optical Hybrid Kabel (AOC) G 5000 50m sw	50000 + 500 / - 100 mm

Kabelquerschnitt / Cable cross-section

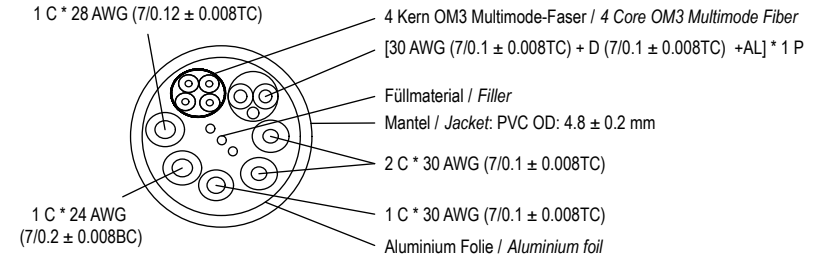

Optisches DisplayPort™ Hybrid-Verbindungskabel 2.0 (AOC), vergoldet


- DisplayPort™-Kabel auf AOC-Basis (Active Optical Cable) mit einem hybriden Glasfaser-Kupferleiter
- Datenraten von bis zu 40,0 Gbit/s
- unidirektional
- unterstützt HDCP 2.2, 3D und EDID
- 20 mm Biegeradius

Anschlüsse: 2x DisplayPort™-Stecker
 Kabeltyp: Rundkabel
 Max. Auflösung: 8K Ultra HD 4320p (60 Hz)
 Betriebstemperatur: 0 °C ~ 50 °C

Optical DisplayPort™ Hybrid Connection Cable 2.0, Gold-Plated (AOC)

- AOC cable (Active Optical Cable) with DisplayPort™ connectors and a hybrid fibre-optic copper conductor
- high data rates of up to 40.0 Gbit/s
- unidirectional
- supports HDCP 2.2, 3D and EDID
- bending radius of 20 mm

Connections: 2x DisplayPort™ plug
 Cable Type: round cable
 Max. Resolution: 8K Ultra HD 4320p (60 Hz)
 Operating temperature: 0 °C ~ 50 °C

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	06.06.2023	rs	 1/1
26.01.2024	alw	gepr.:	06.06.2023	aw	
14.03.2024	ir	Norm:			
Änderungen vorbehalten / Subject to change				Zeichnungs-Nr.: 64866, 64867, 64868, 64869	von